
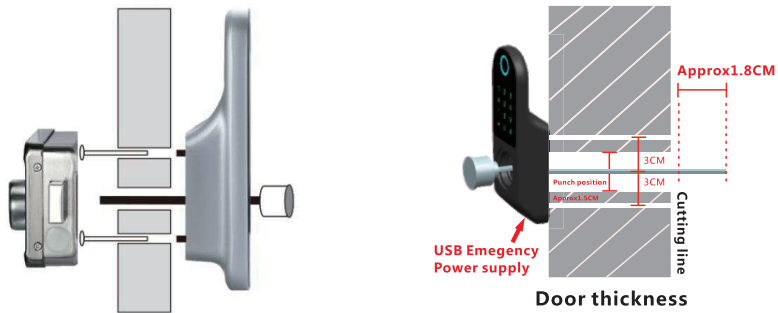


Interface specification

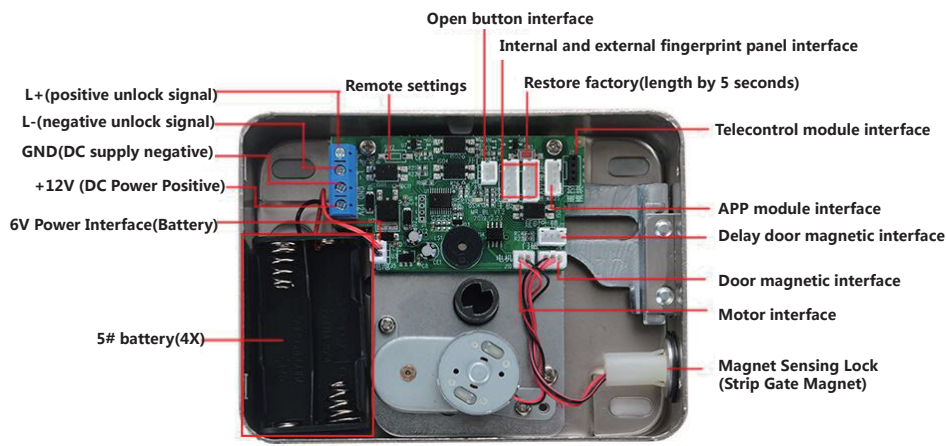

iFinger Smart Door Lock Operation Instructions

Fit for Apartment room door lock, home door lock, office door lock

Technical Parameters

Working Voltage	4X AA 5# alkaline batteries (Not include)
Static current	< 55μA
Unlock ways	Fingerprint, Card, Password, Key (Optional for App or Remote control)
Working current	< 280mA (Strong Drive)
Fingerprint Capacity	≤100
Card Capacity	≤100
Password Capacity	≤100
Remote control capacity	≤120
Resolution	500DPI
FRR (False Reject Rate)	≤0.15%
FAR (False Accept Rate)	≤0.00004%
Working Temperature	-10°C ~ +60°C
Humidity	20% ~ 93%




Function Operation instructions

1. Initialize


Press and hold the setting button (the back panel button) for 5 seconds, and the voice prompt: "initialization successful".

Note: initialization status password: 123456, or any fingerprint can open the door

2. Add administrator information (up to 3 administrators)

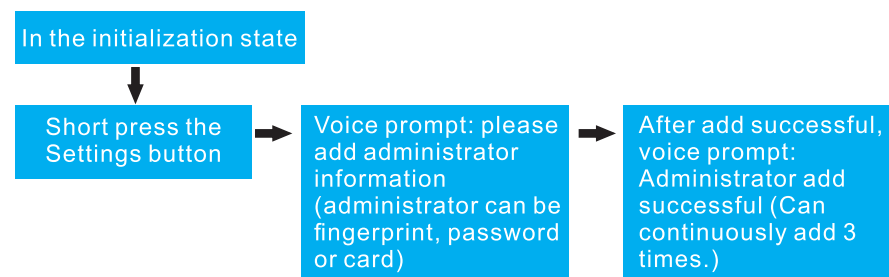


3. Add Unlock user

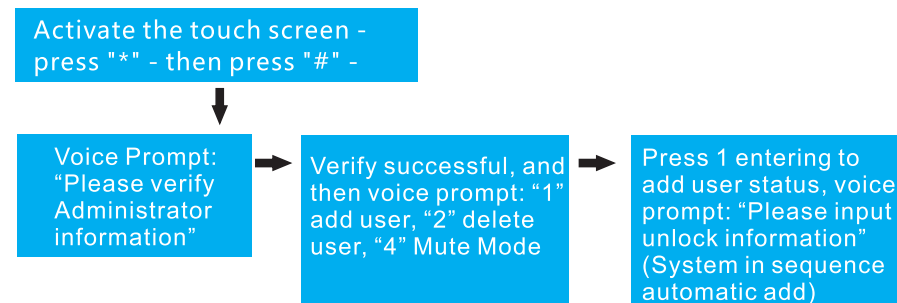

Note: The first 3 unlock user as the Administrator, maximum 300 user.


This lock is not an escape door lock, it's forbidden to be installed on fire escape door, or else at your peril!!!

4. Remove user

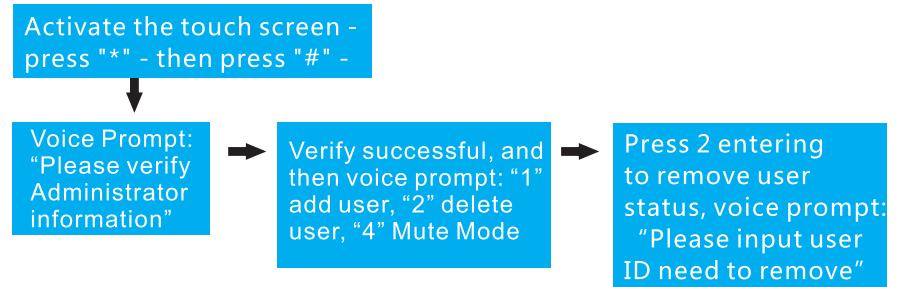

Note: The first 3 unlock user as the Administrator, maximum 300 user.

5. Mute Mode

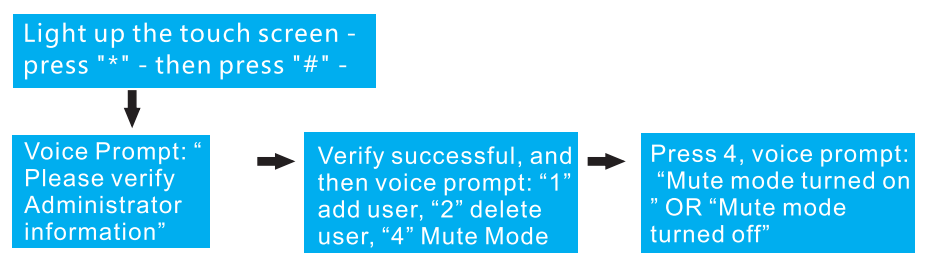

Note: After the mute mode is turned on, each time of your unlock in mute

6. Others

Continuous mistake input 6 time, the Screen will lock 1 minute, and within the times the system will not response to any operation.
 Password with Anti-peeping: "XXX" as your real password, we can enter any number before your Real password, and then press "#". Your real Password must include in the input.
 Each operation more than 12 seconds no operation action system will automatically exit. After the voltage is lower than 4.8v, the lock will automatically alarm every time when the lock is opened. The door lock after the alarm can be unlocked for 200 times. After the number of times is exceeded, the lock will be unlocked every time for delayed unlocked processing. In the initial state, input "555666888#" language switch, support both Chinese and English languages.

If open the door more often, it's better be connected with 12V power supply use.