




RFID Access Card Reader

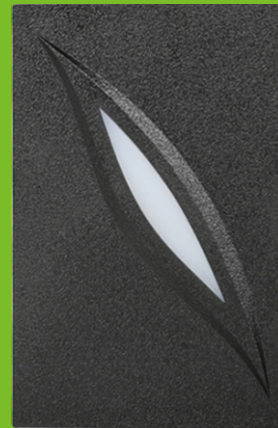

KR100

Product Advantages

- KR100E: 125KHz Proximity card reader with WG26 output
- KR100M: 13.56MHz Mifare card reader with WG34 output
- Read Range: Up to 10CM(125KHz)/5CM(13.56MHz)
- Easy to install on Metal Door Frame or Mullion
- External LED Control
- External Buzzer Control

Specifications

Card Type	EM or MF
Power / Current	DC 6-14V / Max.70mA
Read Range	KR100EM: Up to 10CM, KR100MF: Up to 5CM
Output Format	26bit/34bit Wiegand (default)
Waterproof	IP65
Material	ABS+PC with texture
Dimension	115 x 75 x 18mm

Dimensions(mm)

