




With Signal Output (EL-350ST)  
Without Signal Output (EL-350)

## Single door 180KG Electromagnetic lock

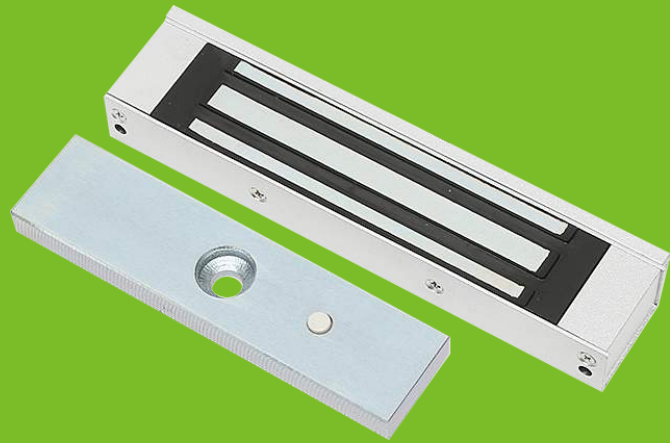


EL-350, EL-350ST


### Specifications

EL-350	Without Signal Output
EL-350ST	With Signal Output
Lock Size	170Lx41.5Wx20.5H(mm)
Armature plate	130Lx33Wx9.3H(mm)
Holding Force	180KG(350Lbs)
Voltage	DC12V or DC24V (24V need to customize)
Current Draw	12V/280mA 24V/150mA
Signal Output	Pls see EL-350TS
Suitable for	Wooden door, Glass door, Metal door, Fireproof door
Surface Temp	≤20°C
Operating Temp	-10°C ~ 55°C (14°F~131°F)
Suitable Humidity	0~90%(non-condensing)
Finishes for Shell	Anodized aluminum surface texture processing
Finishes for Magnetic	Zinc
Finishes for Armature	Zinc
Weight	1.2kg
Standard Packing	20pcs

## Dimensions

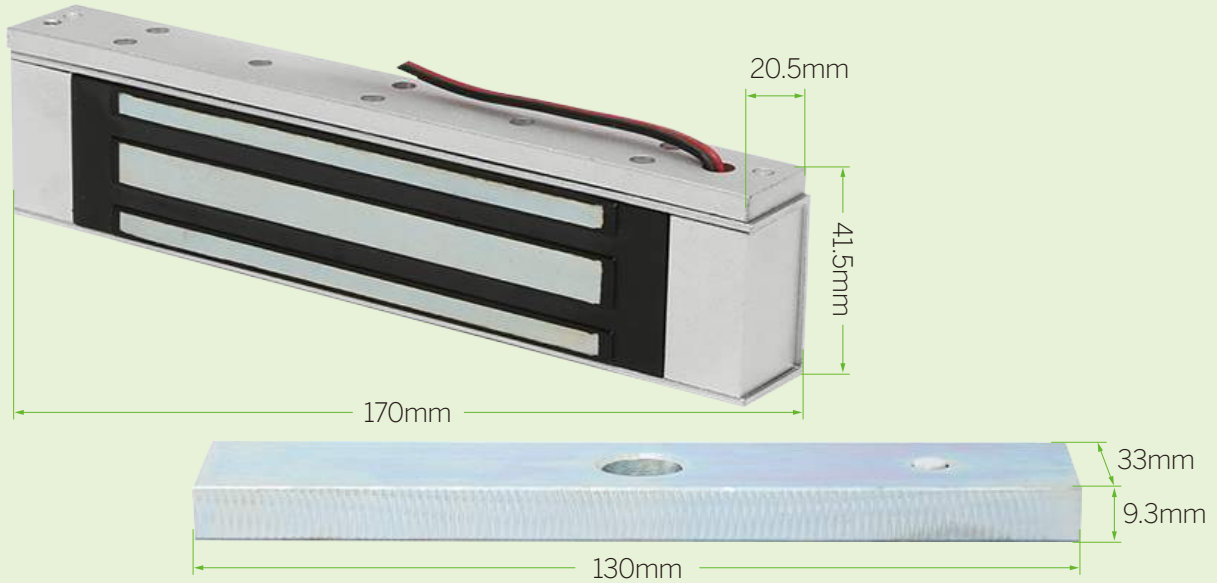

## Wiring diagram

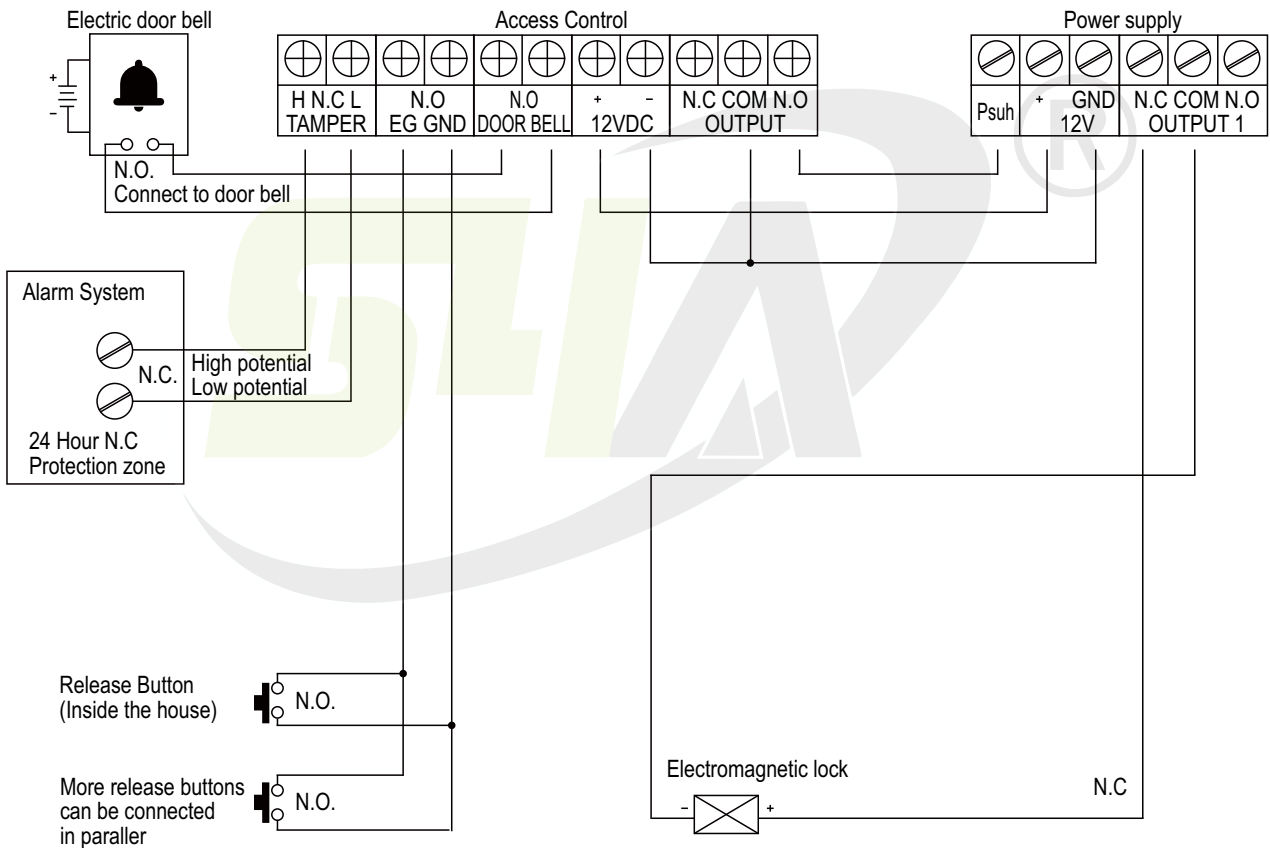

S4A Industrial Co., Limited

Address: 2nd floor of Jinminan Industrial Zone,  
Bulong Rd, Bantian St. Longgan Dist, Shenzhen, China

[www.S4A.com.cn](http://www.S4A.com.cn)

E-mail: [sales@S4A.cn](mailto:sales@S4A.cn) / Skype: crypton0929  
Mob/Whatsapp/Wechat/Viber: +86 130 4080 0588