






## Single door 280KG Electromagnetic lock

EL-600D, EL-600SD, EL-600SZ, EL-600ST, EL-600SA


### Specifications

EL-600	Without indicator lights	
EL-600SD	LED, door sensor	 
EL-600ST	LED, door sensor, Time delay	  
EL-600SZ	LED, door sensor, Buzzer	  
EL-600SA	LED, door sensor, Buzzer (9Wires)	  
Lock size	250Lx48.5Wx25H(mm)	
Armature Plate	180Lx38Wx11H(mm)	
Holding Force	280kg (600Lbs)	
Voltage	DC12V or DC24V (adjustable)	
Current Draw	12V/500mA 24V/250mA	
Signal Output	Dry Contact, Max Rating of Contact Current 3A	
Surface Temp	≤20°C	
Operating Temp	-10°C ~ 55°C (14°F~131°F)	
Suitable Humidity	0~90%(non-condensing)	
Finishes for Shell	Anodized aluminum surface texture processing	
Finishes for Magnetic	Zinc	
Finishes for Armature	Zinc	
Weight	2kg	
Standard Packing	10pcs	

## Dimensions

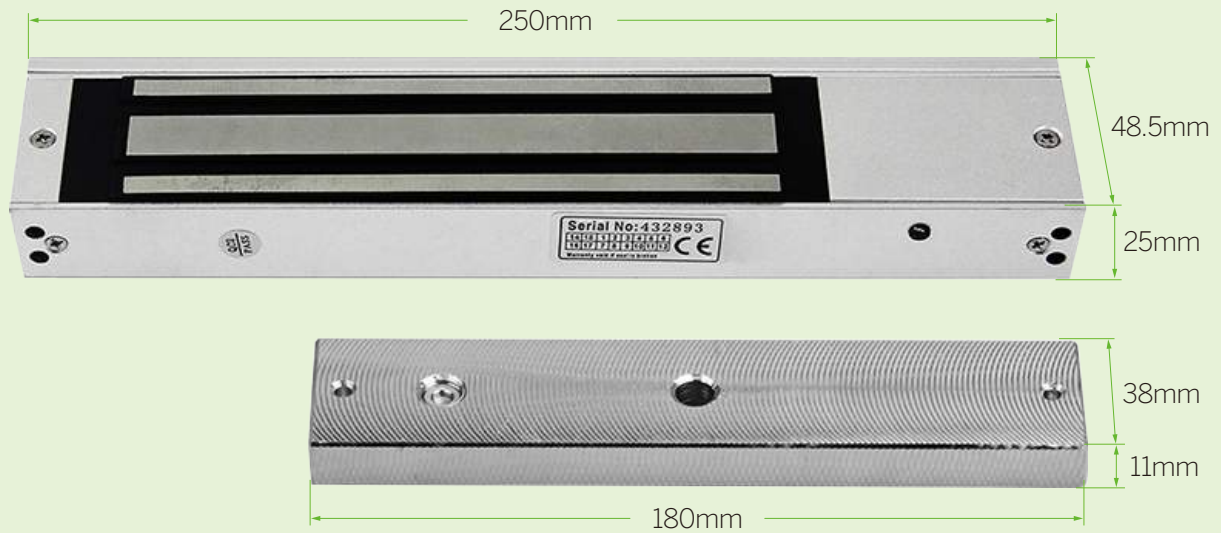

## Wiring diagram

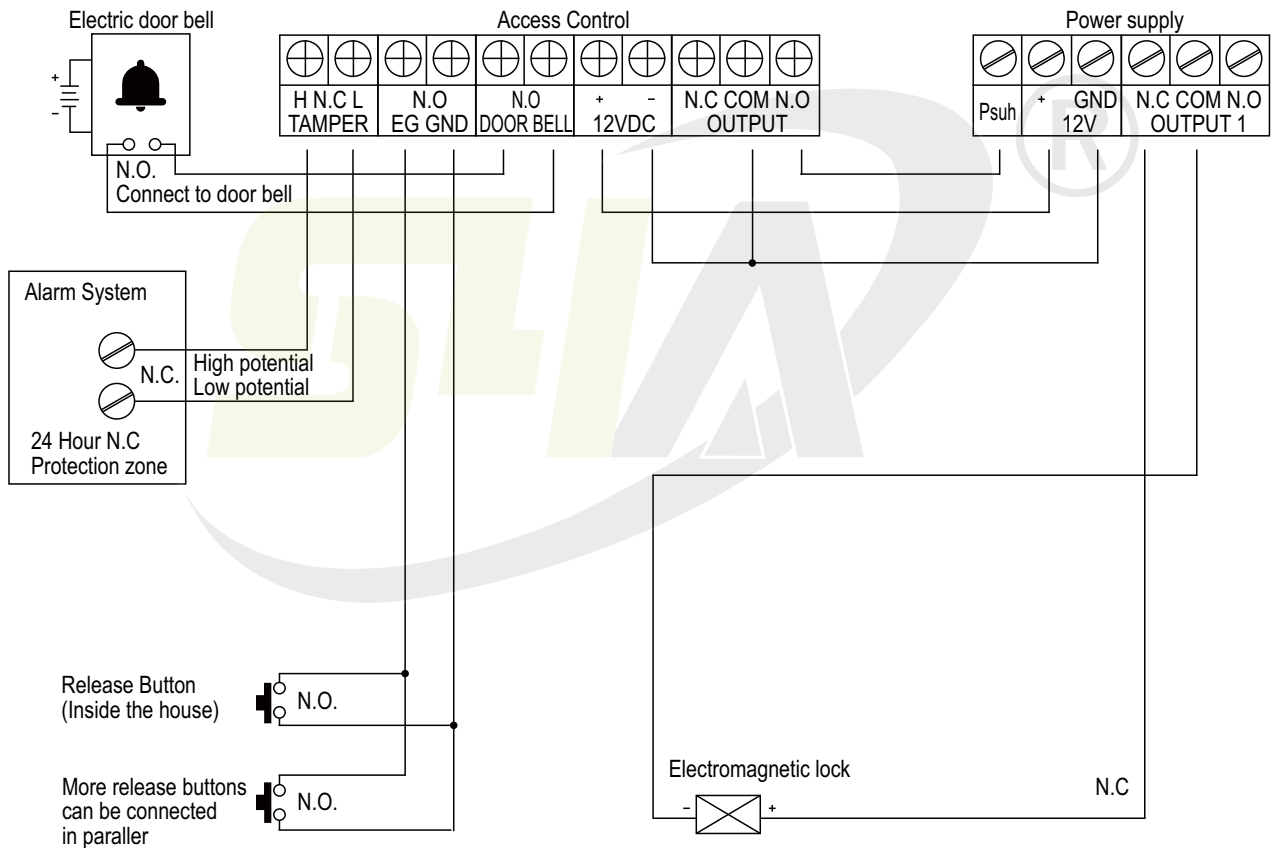

S4A Industrial Co., Limited

Address: 2nd floor of Jinmin Industrial Zone,  
Bulong Rd, Bantian St. Longgan Dist, Shenzhen, China

[www.S4A.com.cn](http://www.S4A.com.cn)

E-mail: [sales@S4A.cn](mailto:sales@S4A.cn) / Skype: crypton0929  
Mob/Whatsapp/Wechat/Viber: +86 130 4080 0588