




Facial Recognition Access Control

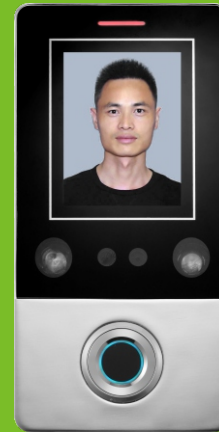

CF1

Product Advantages

- Read 125KHz EM Card (Factory Default)
- Read 13.56MHz Mifare Card (Optional)
- Keypad Characteristic: Infrared remote controller operation.
- Output Protocol: Can operate as a reader. The transmission format could be adjusted by users.
- Access Mode: card, facial recognition , fingerprint, card + fingerprint, card + facial recognition
- Admin Card: admin card, admin fingerprint (add/delete)
- User Capacity: 10,000 card users,1000 facial users and 600 fingerprint users

Specifications

Card Type	EM & MF
User Capacity	10,000 users
Facial Capacity	1,000
Fingerprint Capacity	600
Voltage	DC12V
Standby Current	≤180mA
Dimension	≤300mA
Dimension	139 x 70 x 22mm

Dimensions(mm)

