




Touch-Screen Standalone Access Control

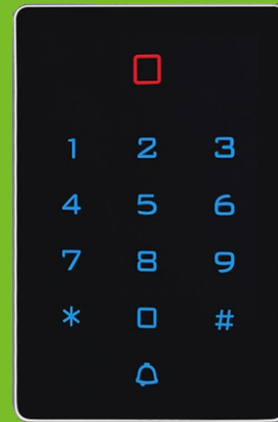

T12 WiFi

Introduction

The unit is single door multifunction touch standalone access controller or a Wiegand output keypad or card reader. It is plastic touch keypad access control. The inbuilt card reader supports 125KHZ EM cards. This unit has the inbuilt upscale microprocessor which make the unit very jam proof, safe and reliable. It is suitable for mounting either indoor or outdoor. This unit supports up to 2000 users in either a Card, 4 digit PIN, or a Card + PIN option. The unit has many extra features including lock output current short circuit protection, Wiegand output, and a backlit keypad. These features make the unit an ideal choice for door access not only for small shops and domestic households but also for commercial and industrial applications such as factories, warehouses, laboratories, banks and prisons.

Specifications

Card Type	EM or MF
Working frequency	125KHz, 13.56MHz
User Capacity	2,000 users
Voltage	DC12V
Reading Range	3~6cm
Wiegand 26	Output & Input
Support	WiFi
Dimension	117 x 71 x 22mm

Dimensions(mm)

